

### INDEPENDENCE OF DOPPLER EFFECT FROM WAVE-LENGTH AT THE MULTI-WAVE CONCERTED SOUNDING AND RECEPTION

*Our researches allowed to set new patterns of display of transversal of Doppler effect in nonrelativistic case at the multiwave concerted sounding and reception of EM emission, sent to the quadratic detector (QD). On this basis we are develop the methods of multiwave doppler laser locator (MDLL). The distinctive feature of the offered methods of MDLL is independence of frequency of doppler signal on the output of QD from a wave-length the emission accepted EM.*

Let a moving object (for example, microparticles) the size of which compare with a wave-length EM emissions move at a speed of  $\bar{V}$  through the sounding area (SA).

In a differential method MDLL (fig. 1) a sounding area is formed with a help of  $\langle n \rangle$ -numbers of pair of coherent beams on lengths of waves  $\lambda_1, \lambda_2, \dots, \lambda_n$  with the change of frequency of one of beams of pair on a wave-length  $\lambda_i$  on the fixed size  $\Omega_m$  which intersect in SA under the concerted angles  $\gamma_1, \gamma_2, \dots, \gamma_n$ . Thus  $n$ -numbers lie in one plane (for example, in horizontal plane — OXZ) and bisectrices of angles  $\gamma_i$  ( $i=1,2,3,\dots,n$ ) all pair of beams coincide in space. The emission dissipated on the moving particle of EM going in a large angular aperture and heads for a quadratic detector.

Expressions, allowing to expect the parameters of differential method of MDLL at which frequency of doppler signal on the output of QD does not depend on a wave-length EM emissions and receive-directions (1)

$$\gamma_i = 2 \cdot \arcsin \left( \frac{\lambda_i}{\lambda_1} \cdot \sin \frac{\gamma_1}{2} \right) \quad (1)$$

where  $i = 2, 3, \dots, n$ .

This frequency is determined only the projection of vector of speed on the difference wave vector of soundings pair of beams (for example, ichnography  $V_x$  if bisectrices of angles of all  $\gamma_i$  coincide with the axis of OZ) The doppler signal on the output of QD is superposition of  $n$ -number signals of one frequency, each of which is formed at a reception EM emission on length of wave  $\lambda_i$  (2)

$$U_g = \sum_{i=1}^n U_{mgi} \cdot \cos \left( (\Omega_m + \omega_{gi}t) - \Phi_{\lambda_i} - \Phi_{si} \right); \quad (2)$$

$$\omega_{g1} = \omega_{g2} = \dots = \frac{4\pi}{\lambda_1} \cdot \sin \frac{\gamma_1}{2} \cdot V_x;$$

$$\Phi_{\lambda_1} = \Phi_{\lambda_2} = \dots = \Phi_{\lambda_n}$$

where  $\Phi_{\lambda_1}$  - component of phase of doppler signal, determined arrival of particle time in the area of measuring, formed crossing of beams on a wave-length  $\lambda_1$ ;

$\Phi_{g1}$  - component of phase of signal, determined the effects of dispersion ( $\Phi_{s1} = 0$ , or  $\Phi_{s1} = 180^\circ$  at the use of forming technologies phase the attended doppler signals [5]).

In an inversion-differential method MDLL a sounding area is formed one narrowly directed sounding bunch (axis OZ) which consist of superposition of n - number of beams on lengths of waves  $\lambda_i$  which have flat wave fronts of EM emissions. Emission dissipated on a moving particle for every wave-length  $\lambda_i$  going in two receive-directions from angles between them equal  $\beta_i$  (for example, in OXZ) and after spatial overlay of their wave vectors in an interferometer (IF) further goes on QD (Fig. 2).

Bisectors of the angles  $\beta_i$  lie in the plane OXZ and coincide with each other (for example, axis OZ). Expressions allow calculation of parameters inversely differential method MDLL, in which the frequency of the doppler signal at the output of the QD does not depend on the wavelength and direction sounding, as determined solely by the projection of the velocity vector on the wave vector difference of the two scattered beams at the appropriate wavelength  $\lambda_i$  (3)

$$\beta_i = 2\arcsin\left(\frac{\lambda_i}{\lambda_1} \sin \frac{\beta_1}{2}\right); \quad (3)$$

$$\omega_{g1} = \omega_{g2} = \dots = \omega_{gn} = \frac{4\pi}{\lambda_1} \cdot \sin \frac{\beta_1}{2} \cdot V_x$$

In MDLL method that implements four-wave mixing mode overlapping electromagnetic EM emission sensitive layer on the surface of the QD, sounding area is formed by two intersecting beams under angle  $\gamma$ , each of which is a superposition of n-number of beams of EM emission at wavelengths  $\lambda_i = (i = 1, 2, \dots, n)$ . Moreover, one of these beams passed a delay line therefore SA crosses pair of beams at a wavelength of mutually noncoherent. Overlaid pairs of beams at each wavelength  $\lambda_i$  collected in two symmetrical directions angled  $\beta_i$  (for example, in the plane OXZ). Bisectrices of these angles  $\beta_i$  each pair of beams at wavelengths  $\lambda_1, \lambda_2, \dots, \lambda_n$  coincide (for example with the axis OZ). Further, all the pairs of beams for each wavelength  $\lambda_i$  spatially combined in interferometer and sent to the surface of the QD. Thus one of each pair of beams at a wavelength for QD before mixing takes place also delay line. The delay time is selected from the conditions for ensuring the coherent overlay mode. As a result, the QD is formed at the output the useful Doppler signal, while the HF crosstalk is suppressed. Expressions allow calculation of geometry parameters agreed MDLL sounding and reception at which the doppler signal has a frequency independent of the wavelength of EM emission.

$$\beta_i = 2\arcsin\left[\frac{\lambda_i}{\lambda_1} \sin \frac{\beta_1}{2} + \left(\frac{\lambda_1 - \lambda_i}{\lambda_1}\right) \sin \frac{\gamma}{2}\right] \quad (4)$$

$$\omega_{g1} = \omega_{g2} = \dots = \omega_{gn} = \frac{8\pi}{\lambda_1} \left[ \cos\left(\frac{\gamma + \beta_1}{4}\right) \sin\left(\frac{\gamma + \beta_1}{4}\right) \right] V_x.$$

For example, consider this method for optical range EM emission wavelengths using an argon laser which emit at three different wavelengths.

Multiwavelength laser doppler anemometer (MLDA) includes (Fig. 3): multiwave laser 1, which emits a beam 2 at three wavelengths  $\lambda_1, \lambda_2$  и  $\lambda_3$  (for example, argon laser), multiwave beam splitter 3 which divides the beam 2 into two beams 4 and 5 of equal intensity at each of wavelengths of emission  $\lambda_1, \lambda_2$  and  $\lambda_3$ ,

frequency shifter 6 a high-frequency generator 7, mirror 8, a delay line 9, aperture diaphragm 10 with eight circular holes, focusing lens 11, measurement area 12, where two beams 4 and 5 intersect at the focus of the lens 11 under the angle  $\gamma$ , scattered beams 13, 14, 15, 16, 17 and 18, selective mirror 19 for the wavelength  $\lambda_3$ , selective mirror 20 for the wavelength  $\lambda_2$ , selective mirror 21 for the wavelength  $\lambda_1$ , delay lines 22, 23 and 24, multiwave composite mixer 25 for the wavelengths  $\lambda_1, \lambda_2, \lambda_3$ , diaphragm 26 with six holes line of six interference filters 27 for the wavelengths  $\lambda_1, \lambda_2$  and  $\lambda_3$ , photodetector 28, meter of doppler frequency 29, block of the formation of two parallel beams 34, which comprises optical elements and devices 3, 6 and 8; an optical time delay device 35 which comprises: 9, 19, 20, 21, 22, 23, 24, 30 and 31; sensor 36 which comprises: 10 and 11; receiving block 37 which comprises: 25, 26, 27 and 28.

MLDA works as follows. Laser 1 emit a beam 2 on three powerful lengths of waves  $\lambda_1, \lambda_2$  и  $\lambda_3$  which divided a beam splitter 3 on two beams of equal intensity 4 and 5. That is why power of beam 4:  $P_4 = P_{\lambda_1} + P_{\lambda_2} + P_{\lambda_3}$  equals power of beam 5:  $P_5 = P_{\lambda_1} + P_{\lambda_2} + P_{\lambda_3}$ , where  $P_{\lambda_i}$  - power of emission on wavelength ( $i=1,2,3$ ). After passing of frequency moving device beam 6 displaced on fixed size frequency  $\Omega_m$  and then reflected from a mirror 8 and spreads like beam 4 parallel and symmetric in relation to the optical axis of chart of OZ. Beams 4 and 5 have the consistent states of polarization. For example these beams are apeak polarized. Beams 4 and 5 after passing through two openings of diaphragm 10 focus an object 11 in the area of measuring 12 in which they intersect under an angle  $\gamma$  (fig.3). However, as beam 5 after passing through the delay line 9 delayed time relative to the beam 4 on a value  $\tau_3 > \tau_{ki}$  ( $\tau_{ki}$  - the maximum time coherence of the emission corresponding to the wavelength of  $\lambda_i$ ), an interference picture is not formed in the area of measuring. At passing through the area of measuring 12 (for example, current of air) the emission dissipated on microparticless is in directions 13 and 14, 15 and 16, 17 and 18 which are symmetrical about the axis OZ, going a lens 11 within the limits of the small round openings of aperture diaphragm 10 which is located in the focal plane of the lens 11.

Scattered beams 13 and 15 after passing the relevant photoregulation 30 and 31 and reflections from selective mirrors 19 and 20 on the wavelengths  $\lambda_1$  and  $\lambda_2$ , passing delay lines 22 and 23 and sent to the first output of compound mixer 25. On the same input of the mixer is directed beam 17 after reflection from selective mirrors 21 at the wavelength of  $\lambda_3$  and going through the delay line 24. Scattered beams 14, 16 and 18, after passing the relevant lines delays 22, 23 and 25, are going for the second entrance of mixer 25 (on fig. 1 on the way beams 14, 16 and 18 shows mirrors 19, 20 and 21 setting of which in the chart of MLDA does not have an of principle value).

Time delay beams 13 -  $\tau_{\lambda_1}$ ; 15 -  $\tau_{\lambda_2}$  и 17 -  $\tau_{\lambda_3}$ , created with the help delay lines 22, 23 and 24, choose that at the optical mixing of pair of beams : 13-14; 15-16; 17-18, for these pair there is the module of degree of temporal coherent  $|\gamma_{\lambda_i}(\tau_3)| = 1$ . On the output of mixer 25 six beams are formed and proper wavelengths:  $\lambda_1, \lambda_2, \lambda_3, \lambda_1, \lambda_2$  and  $\lambda_3$  which pass through six openings of diaphragm 26 and line from six interference colour filters accordingly on wavelengths

$\lambda_1, \lambda_2, \lambda_3, \lambda_1, \lambda_2$  and  $\lambda_3$  and further sent on a photocathode of photodetector 28. On the output of photodetector 28 three useful high-quality signals are formed and correspond the optical mixing of the dissipated beams on wavelengths.  $\lambda_1, \lambda_2$  and  $\lambda_3$ , on doppler frequency

$$\omega_{g_i} = \Omega_M + \frac{8\pi}{\lambda_1} \left( \cos \left( \frac{\gamma + \alpha_i}{4} \right) \sin \left( \frac{\gamma + \alpha_i}{4} \right) \right) V_x$$

where  $\alpha_i$  - the angle between the scattered beams ( $i=1,2,3$ ) on wavelength  $\lambda_1$ ,

$V_x$  - the horizontal projection of the velocity vector  $\bar{V}$ .

These three signals coincide on frequency  $\omega_{g_1} = \omega_{g_2} = \dots = \omega_{g_n}$  and added. If the geometry of the probing and scattered beams is the following relation

$$\alpha_i = 2 \arcsin \left[ \frac{\lambda_i}{\lambda_1} \sin \frac{\alpha_1}{2} + \left( \frac{\lambda_1 - \lambda_i}{\lambda_1} \right) \sin \frac{\gamma}{2} \right]$$

where:  $\lambda_1 > \lambda_2 > \lambda_3$   
and  $i=2,3$

Three useful signal on one frequency  $\omega_g$ , specific parameters of the optical scheme of MLDA may have different phase. Therefore for increasing power total useful signal on frequency  $\omega_g$ , it is necessary to provide the phase concordance of these three signals also [4].

Equiphase condition of these three signals is ensured with the photoregulator 30 and 31. On the output of photodetector 2 also can be formed high-frequency signals-interference, accordingly 5 signals-interference for each of wavelengths  $\lambda_1, \lambda_2$  and  $\lambda_3$ .

However, for a scheme of MLDA (fig. 3) these 15 signal-interference automatically suppressed because of these signals module complete the degree of temporal coherence equal zero.

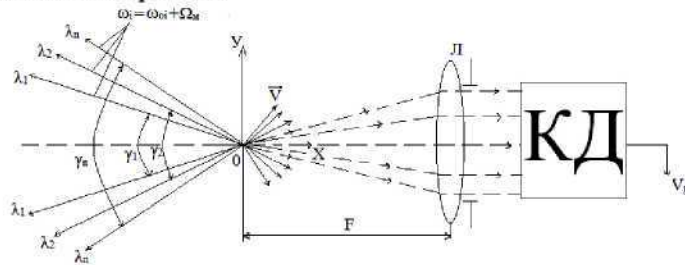


Fig. 1

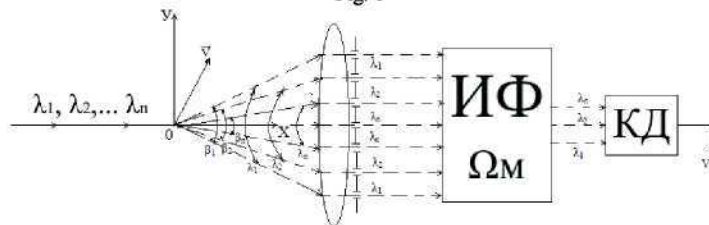


Fig. 2

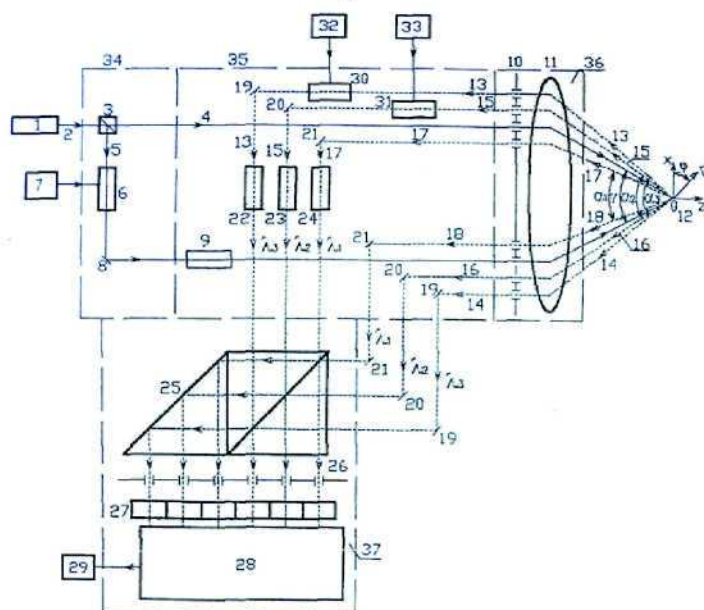


Fig. 3

### Conclusion

For the first time established patterns manifestations of doppler effect and proposed methods MDLL which were realized in the developed practical schemes. Based on the first method MDLL in development [1]; the second method MDLL in [2]; and on the third method MDLL in [3] (fig.3); (and in other devices, protected by patents) experimentally confirmed for the optical wavelength range. In this area of spectrum of EM the emissions of MLDL are widely used for the aerodynamic tests of aerospace technique [4,5].

### References

1. Землянский В.М., Клочков В.П. Лазерный измеритель вибрации. А.С. СССР № 1254313, Бюл.№ 32 от 30.08.86
2. Землянский В.М. Лазерный однокомпонентный измеритель вибрации. А.С. СССР №1341498, Бюл. №36 от 30.09.87
3. Землянский В.М., Гусев М.О. Багатохвильовий лазерний доплерівський анемометр, Патент України №5, від 11.03.2013.
4. Лазерная анемометрия, дистанционная спектроскопия и интерферометрия.//Под.ред. М.С. Соскина, К : Наукова думка, 1985.-759с.
5. Землянский В.М. Измерение скорости лазерным доплеровским методом.- К.:Вицашк., 19787.-177с.